



SPECIFICATIONS

Mounting : Top

Material of Float/Stem : AISI 304 SS

Process Connection : 1/8" BSP(M)

Din Connector : No

Max. Temperature : 100°C

Max. Pressure : 10 bar

Min. Specific Gravity : 0.75

Switching Differential : ± 3mm

Reed Switch : Hermetically sealed

Switch Rating : 0.5 Amp

Switching Voltage : 230 VAC

Carrying Current : 1 Amp


Insulation Resistance : 100Ω

ORDERING CODE

S.No	Level Switch Series	LS03		
1.	Reed Switch	X	1	1 SPST (0.5 Amp, 230 VAC) (Standard)
			2	1 SPDT (0.5 Amp, 230 VAC)
2.	Process Connection	xxx	18B	1/8" BSP(M)(Standard)
3.	Cable Length	XX	35	3.5m

Example Code: LS03-1-18B-35

DIMENSIONS

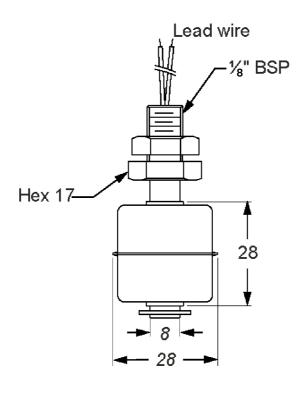



FUTURISTIC TECHNOLOGIES

232, Sunrise Mall, Mansi Circle, Vastrapur, Ahmedabad, Gujarat 380015, INDIA

% +91 6355915927

www.futuristictechnologies.co.in